




# Technical Data Sheet

JANUARY 2016, REV:03

## MELPOLY<sup>®</sup> R400-2 (Aromatic Polyester Polyol)

CAS NUMBER: Confidential

EINECS NUMBER: Polymer

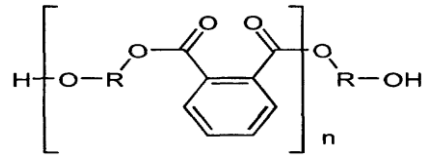

PARAMETERS	SPECIFICATIONS	TEST METHODS
VISCOSITY (@20°C, cPs)	450-1000	ASTM D-4878
OH NUMBER (mg KOH/g)	350±50	ASTM D-4274
ACID NUMBER (mg KOH/g)	Max 2.00	ASTM D-4662-03
WATER CONTENT (% w/w)	Max 2.00	ASTM 4672
pH	7.00 – 8.50	ISO 14899
SPECIFIC GRAVITY (@20°C g/cm <sup>3</sup> )	1.170±0.08	ASTM D-4659
FUNCTIONALITY	2	ISO 17710

### Applications:

Sandwich panel, polyisocyanurate (PIR) applications, block isolation equipments, refrigerator isolation, deep freezer isolation, vessel isolation, chilled store isolation, building isolation



PET Resin, Plasticers & PVC FloorCover

Address: Batı Otoban Bağlantı Yolu Üzeri Büyük Dikili Mah.93099 Sok.No: 4/A Seyhan/ADANA/TURKEY

Tel:+90-322 485 62 67 Fax:+90-322 485 62 03

[www.meltemkimya.com.tr](http://www.meltemkimya.com.tr)

Operating With: ISO 9001-2000, ISO 14001, OHSAS 18001-2004, TSE