




Technical Data Sheet

MAY 2016, REV:00

MELPOLY[®] VSC-250-G20

CAS NUMBER: Confidential
EINECS NUMBER: Aliphatic Polymer

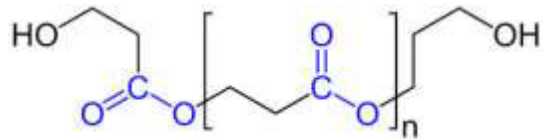

PARAMETERS	SPECIFICATIONS	TEST METHODS
VISCOSITY (@20°C, cPs)	5000-10000	ASTM D-4878
OH NUMBER (mg KOH/g)	250±50	ASTM D-4274
ACID NUMBER (mg KOH/g)	Max 2.00	ASTM D-4662-03
WATER CONTENT (% w/w)	Max 0.8	ASTM 4672
SPECIFIC GRAVITY (@40°C g/cm ³)	1.250± 0.05	ASTM D-4659
FUNCTIONALITY	3	ISO 17710

Applications:

Unique performance characteristics, which include shape conformance, vibration and sound damping, and energy and shock absorption, make these the foams of choice for many diverse applications such as pillows, mattress toppers, automotive trim, sports and medical equipment, and ergonomic cushions and pads.



PET Resin, Plastics & PVC Floor Cover

Address: Batı Otoban Bağlantı Yolu Üzeri Büyük Dikili Mevkii Adana 01210 .Turkey

Tel:+90-322 485 52 24, Fax:+90-322 485 62 03

www.meltemkimya.com.tr

Operating With: ISO 9001-2000, ISO 14001, OHSAS 18001-2004, TSE