




Technical Data Sheet

APRIL 2014, REV:02

MELPOLY® V200-2 (Aromatic Polyester Polyol)

CAS NUMBER: Confidential
EINECS NUMBER: Polymer

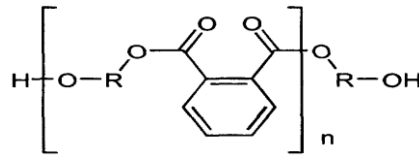

| PARAMETERS | SPECIFICATIONS | TEST METHODS |
|--------------------------------|----------------|----------------|
| VISCOSITY (@20°C, cPs) | 1500 - 5500 | ASTM D-4878 |
| OH NUMBER (mg KOH/g) | 250±50 | ASTM D-4274 |
| ACID NUMBER (mg KOH/g) | Max 2.00 | ASTM D-4662-03 |
| WATER CONTENT (% w/w) | Max 0.8 | ASTM 4672 |
| pH | 6,5 – 7,5 | ISO 14899 |
| SPECIFIC GRAVITY (@20°C g/cm³) | 1.230±0.08 | ASTM D-4659 |
| FUNCTIONALITY | 2 | ISO 17710 |

Applications:

Sandwich panel, polyisocyanurate (PIR) applications, block isolation equipments, refrigerator isolation, deep freezer isolation, vessel isolation, chilled store isolation, building isolation



PET Resin, Plasticers & PVC Floor Cover

Address: Batı Otoban Bağlantı Yolu Üzeri Büyük Dikili Mevkii Adana 01210 .Turkey

Tel:+90-322 485 52 24, Fax:+90-322 485 62 03

www.meltemkimya.com.tr

Operating With: ISO 9001-2000, ISO 14001, OHSAS 18001-2004, TSE